
ARMYLOR® Column DESIGN

- ARMYLOR® Columns consist on a construction by element without gaskets:
 - Flanged elements with maximum height of 1500 mm per section,
 - Assembly without gaskets,





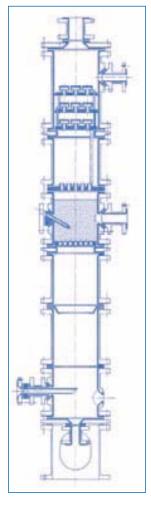

• Nozzles made by mechanical extraction,



- Support ring (donut) between elements for installation of internals,
- Internals in graphite, metals or plastic materials.



ARMYLOR® PTFE thick liners are loose inside the steel shell

■ Diameters up to 64":

- Seamless liners,
- Standard or heavy duty PTFE thickness (up to 10 mm),
- Fine powders of PTFE.

■ Diameters > 64":

- Welded PTFE liners,
- Standard thickness 3 or 4 mm.





Service Process Equipment, Inc. PO Box 850908 Mobile AL 36685-0908 251.342.1313•Fax 251.342.1377

Email msellers@serviceprocess.net

